

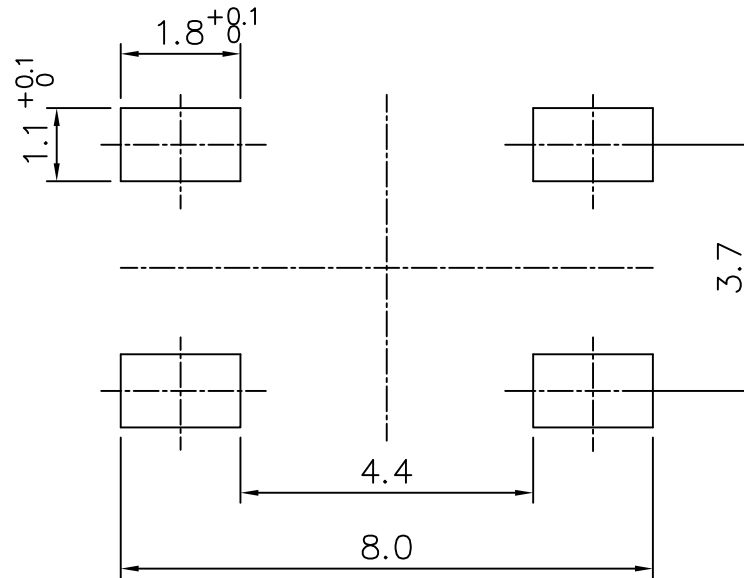


P.C.B LAND PATTERN

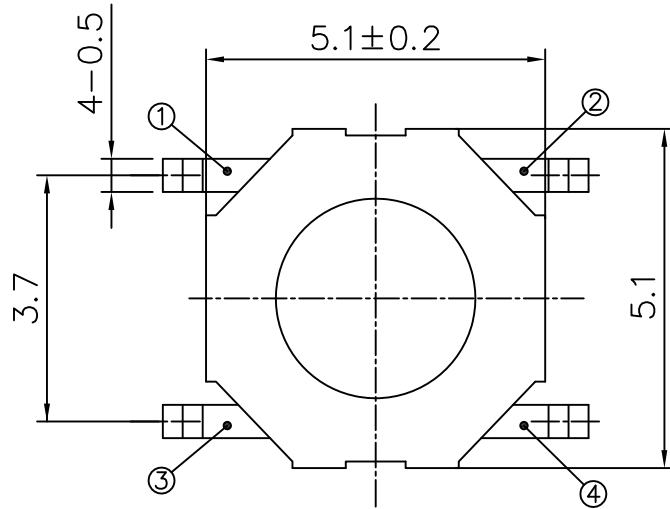



CIRCUIT DIAGRAM



SPECIFICATION

1. RATING : DC 12V 50mA
2. TRAVEL : 0.2±0.1mm
3. CONTACT RESISTANCE : 100mΩ MAX.
4. BOUNCE : 10m SEC MAX.

MODEL	OPERATING FORCE	LIFE CYCLES
T1187M-0	110±50gf	1,000,000 CYCLE
T1187M-1	130±50gf	1,000,000 CYCLE
T1187M-2	160±50gf	1,000,000 CYCLE
T1187M-3	250±50gf	200,000 CYCLE

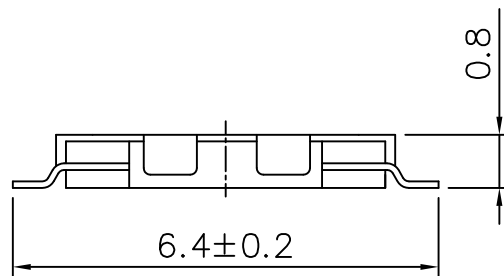

PART NO.					MODEL		Q'TY	MATERIAL	SPECIFICATION		TREATMENT	REFERENCE
TOLERANCE UNLESS OTHERWISE STATED(mm) less than 10 _____ ±0.1 10~30 _____ ±0.2 30~100 _____ ±0.3 ANGLE _____ ±2°							TRIGONOMETRY	UNIT m/m	SCALE 1/1	USER	TACT SWITCH	
							APPROVAL	CHECK	DESIGN	TITLE	T 1187M	
										DWG NO.	T 1187M-0	
					MARK	DATE	APPR.	CHECK	DESIGN			