



CIRCUIT DIAGRAM

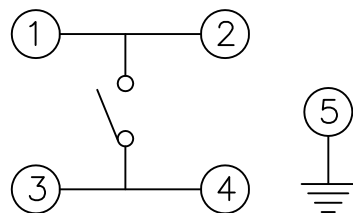

P.C.B LAND PATTERN

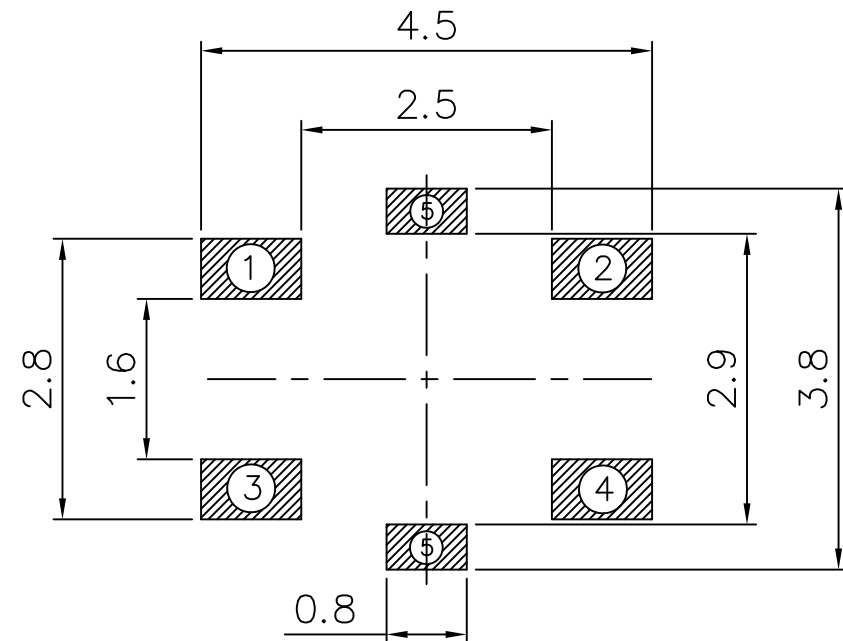

SPECIFICATION

1. RATING : DC 12V 50mA
2. TRAVEL : 0.2±0.1mm
3. CONTACT RESISTANCE : 100mΩ MAX.
4. BOUNCE : 10m SEC MAX.

5.	MODEL	OPERATING FORCE	LIFE CYCLES
	T 1188 -2	160±50gf	200,000 CYCLE
	T 1188 -3	250±80gf	100,000 CYCLE

	PART NO.	MODEL				Q'TY	MATERIAL	SPECIFICATION	TREATMENT	REFERENCE
TOLERANCE UNLESS OTHERWISE STATED(mm)						TRIGONOMETRY	UNIT m/m	SCALE $\frac{1}{1}$	USER	TACT SWITCH
less than 10 _____ ±0.1						APPROVAL	CHECK	DESIGN	TITLE	T 1188
10~30 _____ ±0.2									DWG NO.	T 1188-1
30~100 _____ ±0.3										
ANGLE _____ ±2°	MARK	DATE	APPR.	CHECK	DESIGN					