




CIRCUIT DIAGRAM



P.C.B LAND PATTERN

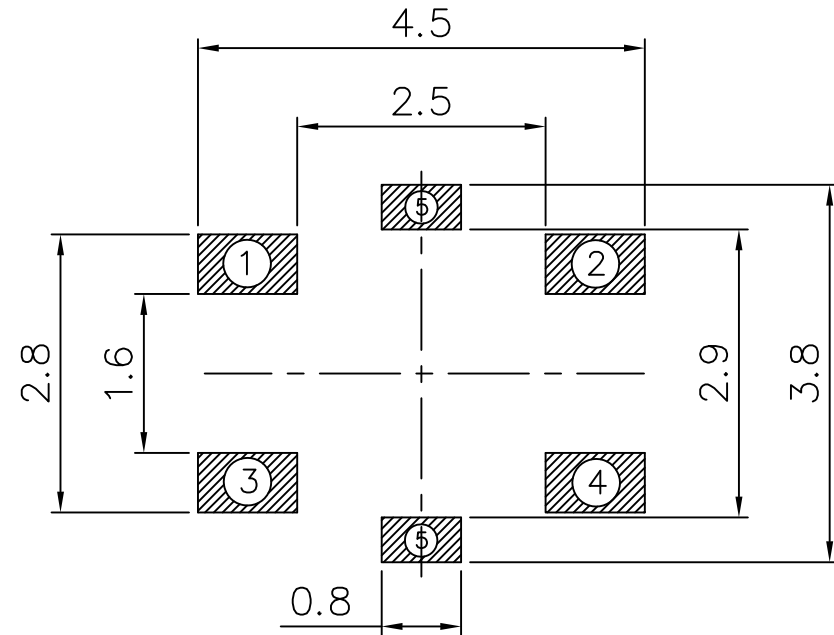

SPECIFICATION

1. RATING : DC 12V 50mA
2. TRAVEL : 0.2 ± 0.1 mm
3. CONTACT RESISTANCE : 100m Ω MAX.
4. BOUNCE : 10m SEC MAX.

MODEL	OPERATING FORCE	LIFE CYCLES
T 1188M -2	160 \pm 50gf	200,000 CYCLE
T 1188M -3	250 \pm 80gf	100,000 CYCLE

TOLERANCE UNLESS OTHERWISE STATED(mm)					PART NO.	MODEL	Q'TY	MATERIAL	SPECIFICATION	TREATMENT	REFERENCE
less than 10	± 0.1							TRIGONOMETRY	UNIT m/m	SCALE 1/1	USER
10~30	± 0.2							APPROVAL	CHECK	DESIGN	TITLE
30~100	± 0.3										DWG NO.
ANGLE	$\pm 2^\circ$										
MARK	DATE	APPR.	CHECK	DESIGN							